


FLEXIBLE SOLAR PANEL

SP200W-20M

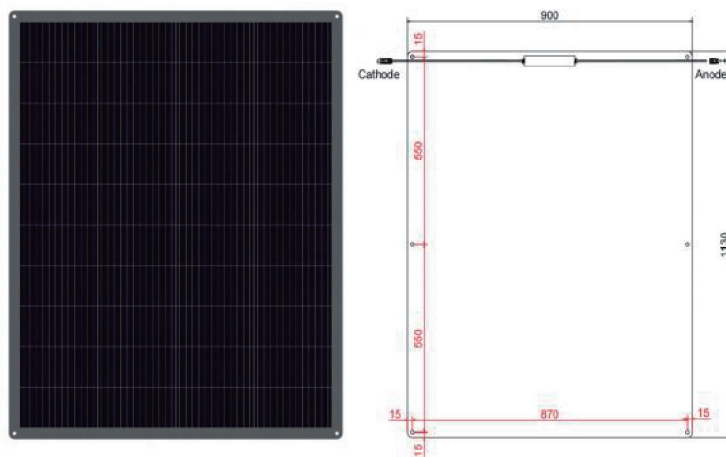

ELECTRICAL DATA

Model Type	SP200W-20M
Peak Power(Pmax)	200
Maximum Power Voltage(Vmp)	22.53V
Maximum Power Current(Impp)	8.88A
Open Circuit Voltage(Voc)	26.56V
Short Circuit Current(Isc)	9.39A
Module Efficiency(%)	19.45
* STC: irradiance 1000 W/m2, AM 1.5G, and cell temperature of 25°C	

THERMAL CHARACTERISTICS & OPERATING CONDITIONS

Maximum System Voltage(V)	1000
Maximum Series Fuse Rating(A)	10
Power Tolerance	0~+3%
Pmax Temperature Coefficients(W/°C)	-0.400%
Voc Temperature Coefficients(V/°C)	-0.330%
Isc Temperature Coefficients(A/°C)	+0.048%
NOCT Nominal Operating Cell Temperature(°C)	45±2
Operating and Storage Temperature(°C)	-40~+85

MECHANICAL CHARACTERISTICS

Cell Type	210*105Mono
No. of Cells	40(4*10)
Dimensions	1130*900*3mm
Weight	3.75kg
Junction box	IP65/IP67
Output cables	4mm² cable 90cm + mc4
MaxWind Load/Snow Load	2400Pa/5400Pa

PACKING WAY--2PCS/BOX WITH PALLET

2pcs per box size	1142 * 912 * 58mm
Quantity in 1*40HQ container	984boxes / 1968PCS
Quantity in 1*20GP container	444boxes / 888PCS

CONTACT US >

Sunpal Power Co.,Ltd.

Email: sales38@sunpalpower.com

Phone/WhatsApp/Wechat:+86 13696791434

